
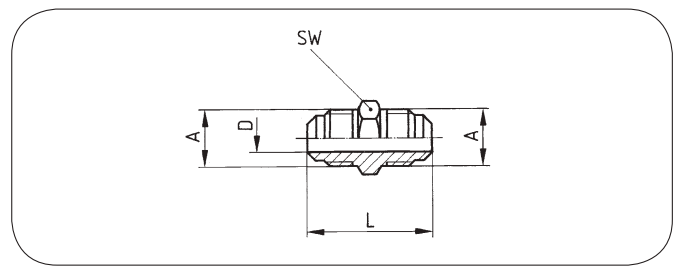


Verbindungsrippel / Reduziernippel DIN 8906*

(bis max. 140bar zul. Betriebsdruck)

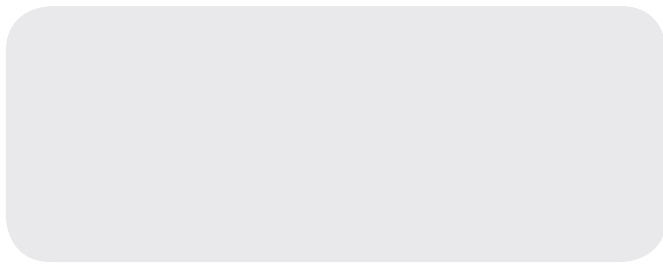

	Bestell-Nr.	für Rohr-Ø außen		A	D	L	SW	Gewicht
		mm	Inch	UNF	mm	mm	mm	kg
VN	2700304050	6		G 1/4	5,5	35	14	0,030
VN	2700305050	6	1/4"	7/16"	4,0	33	14	0,020
VN	2700309050	10	3/8"	5/8"	7,0	39	17	0,050
VN	2700311050	12	1/2"	3/4"	10,0	44	22	0,070
VN	2700316050	15/16	5/8"	7/8"	13,0	48	24	0,090
VN	2700320050	18	3/4"	1 1/16"	15,0	60	32	0,170
VN	2700327050	22	7/8"	1 1/4"	20,0	64	32	0,210